



| CODICE     | base   | dimensioni  | V  | W  | CD | ISSA code | conf. | PREZZO |
|------------|--------|-------------|----|----|----|-----------|-------|--------|
| B15.10.12P | BaY15d | 36x60       | 12 | 10 | 20 |           | 1/25  | 6,60   |
| B15.25.12P | BaY15d | 36x60       | 12 | 25 | 40 |           | 1/25  | 6,60   |
| B15.10.24P | BaY15d | 36x60       | 24 | 10 | 20 |           | 1/25  | 6,60   |
| B15.25.24P | BaY15d | 36x60       | 24 | 25 | 40 |           | 1/25  | 6,60   |
| B15.10.12T | BaY15d | 25x67       | 12 | 10 | 20 | *         | 1/25  | 6,40   |
| B15.25.12T | BaY15d | 25x67       | 12 | 25 | 40 | *         | 1/25  | 6,40   |
| B15.10.24T | BaY15d | 25x67       | 24 | 10 | 20 | *         | 1/25  | 6,40   |
| B15.25.24T | BaY15d | 25x67       | 24 | 25 | 40 | *         | 1/25  | 6,40   |
|            |        | a richiesta | 28 | 25 |    |           |       |        |


\* A richiesta in esecuzione approvata Royal Netherlands Metereological Institute certificato N87/02

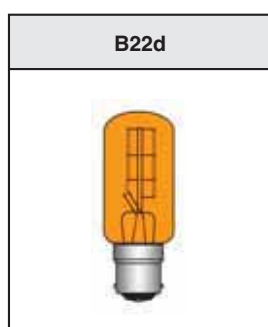


| CODICE     | base | dimensioni | V   | W | CD | ISSA code | conf. | PREZZO |
|------------|------|------------|-----|---|----|-----------|-------|--------|
| B22.26.024 | B22d | 38x98      | 24  |   | 26 |           | 10    | 9,20   |
| B22.13.110 | B22d | 38x98      | 110 |   | 13 | 790426    | 10    | 9,60   |
| B22.26.110 | B22d | 38x98      | 110 |   | 26 | 790427    | 10    | 9,60   |
| B22.65.110 | B22d | 38x111     | 110 |   | 65 |           | 10    | 9,60   |
| B22.13.220 | B22d | 38x98      | 220 |   | 13 | 790428    | 10    | 9,60   |
| B22.26.220 | B22d | 38x98      | 220 |   | 26 | 790429    | 10    | 9,60   |
| B22.65.220 | B22d | 38x111     | 220 |   | 65 |           | 10    | 9,60   |



| CODICE      | base | dimensioni | V   | W  | figura | ISSA code  | conf. | PREZZO |
|-------------|------|------------|-----|----|--------|------------|-------|--------|
| P28.40.024  | P28s | 38x108     | 24  | 40 | A      |            | 10    | 13,40  |
| P28.60.110  | P28s | 38x108     | 110 | 60 | B      | 790432     | 10    | 15,80  |
| P28.65.220  | P28s | 38x108     | 220 | 65 | B      | 790434     | 10    | 12,20  |
| P28.65.220L | P28s | 38x108     | 220 | 65 | B      | (4000 ore) | 10    | 13,40  |



| CODICE     | base | dimensioni | V   | CD | figura | ISSA code | conf. | PREZZO |
|------------|------|------------|-----|----|--------|-----------|-------|--------|
| E27.26.220 | E27  | 38x98      | 220 | 26 | A      | 790424    | 10    | 9,60   |
| E27.65.220 | E27  | 38x111     | 220 | 65 | B      |           | 10    | 9,60   |

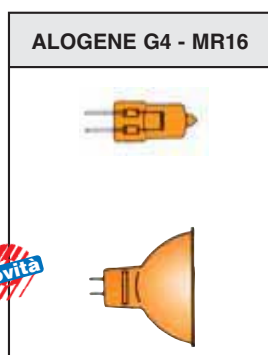

| CODICE     | base  | dimensioni   | V  | W  | durata/h | lumen      | conf. | PREZZO |
|------------|-------|--------------|----|----|----------|------------|-------|--------|
| G4.12.10   | G4    | 9x30         | 12 | 10 | 2.000    | 120        | 50    | 1,30   |
| G4.12.20   | G4    | 9x30         | 12 | 20 | 2.000    | 320        | 50    | 0,85   |
| G4.24.10   | G4    | 9x30         | 24 | 10 | 2.000    | 120        | 50    | 1,80   |
| G4.24.20   | G4    | 9x30         | 24 | 20 | 2.000    | 320        | 50    | 1,80   |
| G4.28.10   | G4    | 9x30         | 28 | 10 | 2.000    | 120        | 50    | 2,20   |
| G4.28.20   | G4    | 9x30         | 28 | 20 | 2.000    | 320        | 50    | 2,30   |
| H35.20.28V | GU4   | MR11 + vetro | 28 | 20 | 2.000    | 210 cd 30° | 10    | 9,40   |
| H50.20.28V | GU5,3 | MR16 + vetro | 28 | 20 | 2.000    | 200 cd 38° | 10    | 9,60   |



| CODICE   | base | dimensioni | V  | W   | durata/h | lumen | conf. | PREZZO |
|----------|------|------------|----|-----|----------|-------|-------|--------|
| PP500.27 | E40  | 130x270    | 27 | 500 | 1.000    | 9.000 | 25    | 22,20  |

Novità